

**Notice**

- 1) The statements and data given in this publication are believed to be accurate. They are presented without any guarantee or warranty, express or implied. Statements or suggestions regarding the use of these products are made without representation or warranty that any such use is free of patent infringement and are not recommendations to infringe any patent. The user should not assume that all safety measures are indicated.
- 2) Please refer to the MSDS (Material Safety Data Sheet) for safety and details.
- 3) This product is not designed for use in the implantation of the human body or for medical applications that come in contact with body fluid or body tissues. ASAHI GLASS CO., LTD. carries out no test as to the fitness of the product for any medical applications.
- 4) The contents are subject to change without prior notice.

**AGC Chemicals, Fluoropolymers Group
ASAHI GLASS CO., LTD.**

Shin-Marunouchi Bldg., 1-5-1 Marunouchi Chiyoda-ku, Tokyo 100-8405 Japan Phone: +81-3-3218-5875 Facsimile: +81-3-3218-7856
<http://www.agc.com/>
Fluon® Website <http://www.fluon.jp/>

AGC Chemicals Americas, Inc.

55 East Uwchlan Ave. Suite 201, Exton, PA 19341 USA Phone: +1-610-423-4300 Facsimile: +1-610-423-4301

AGC Chemicals Europe, Ltd.


PO Box 4, Thornton Cleveleys, Lancashire, FY5 4QD UK Phone: +44-1253-861957 Facsimile: +44-1253-861950

AGC Asia Pacific Pte. Ltd.


460 Alexandra Road #30-02, PSA Building, 119963 Singapore Phone: +65-6273-5656 Facsimile: +65-6276-8783

AGC Chemicals Trading (Shanghai) Co., Ltd.

Room 2701-2705, Metro Plaza, 555 Lou Shan Guan Road, Chang Ning Ward, Shanghai, 200051 China
Phone: +86-21-6386-2211 Facsimile: +86-21-6386-5377

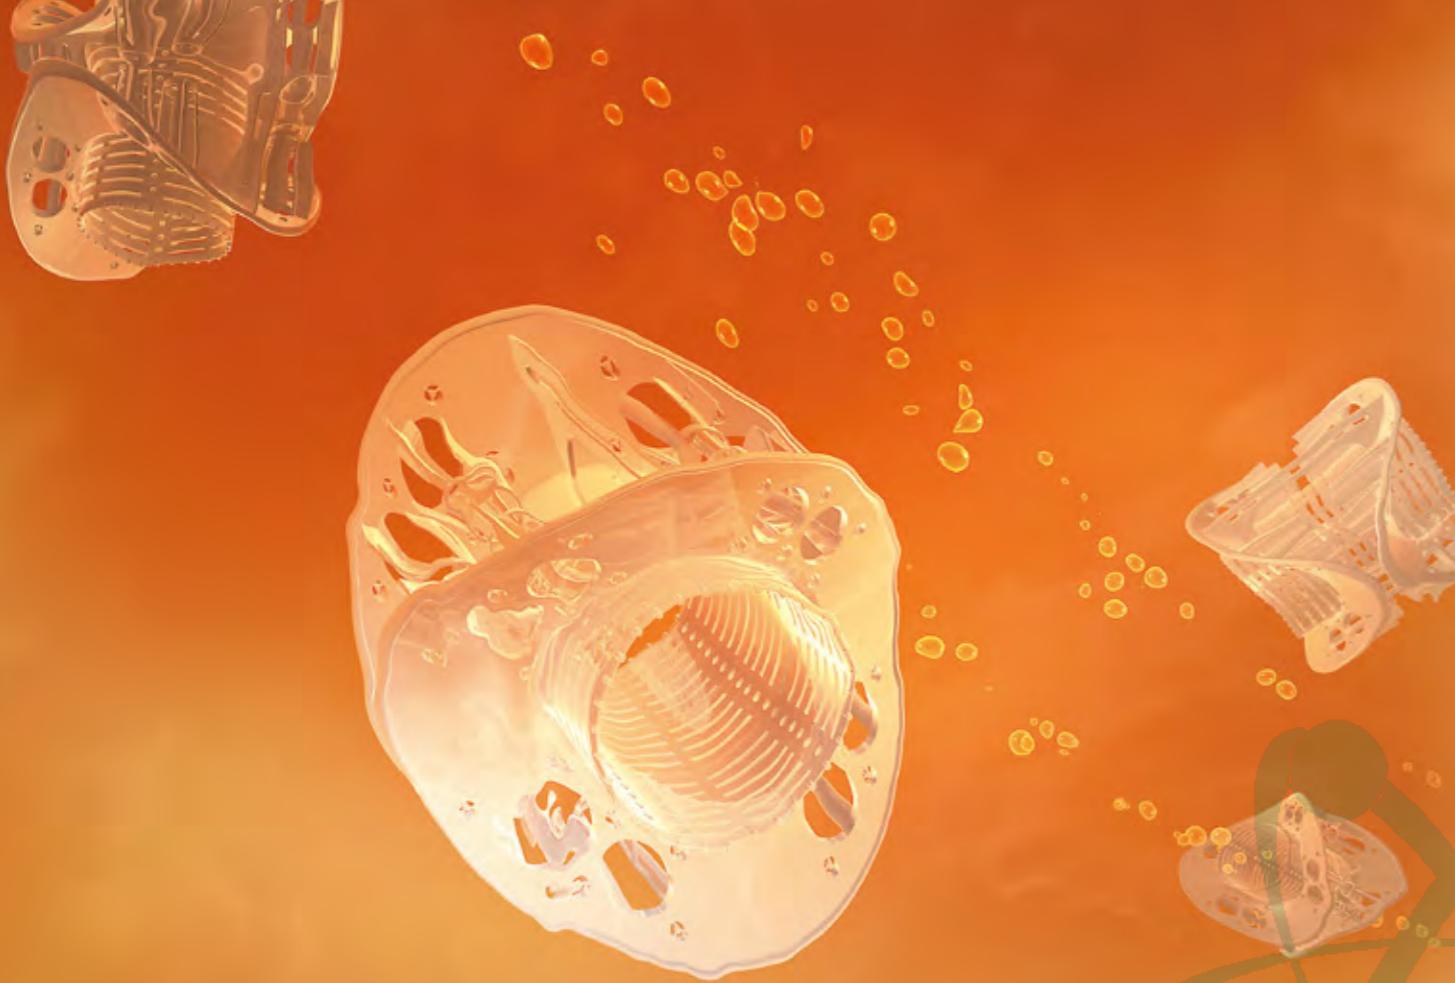

**Recommended for flexible,
high- performance designs**
**Fluon® ETFE is a fluoropolymer with
excellent processability.**

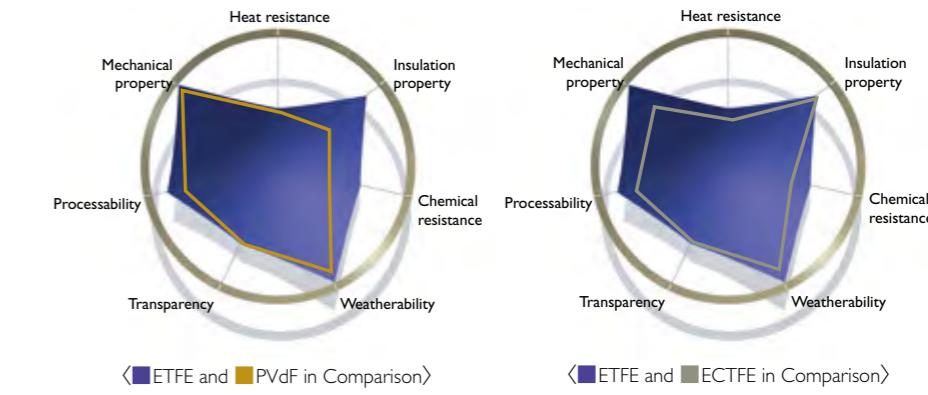


Fluon® ETFE can be flexibly adopted to various changing needs from simple and high-quality parts to complicated and high-performance products.

Fluon® ETFE is a thermoplastic fluoropolymer developed by Asahi Glass Co, Ltd. It is a copolymer comprised of tetrafluoroethylene (C_2F_4) and ethylene (C_2H_4).



It has excellent mechanical property and processability, and can be molded in various methods such as extrusion molding, injection molding, blow molding, coating and lining, etc.

Moreover, with its excellent chemical resistance, electrical property and usability, it provides high performances and versatility in various fields.

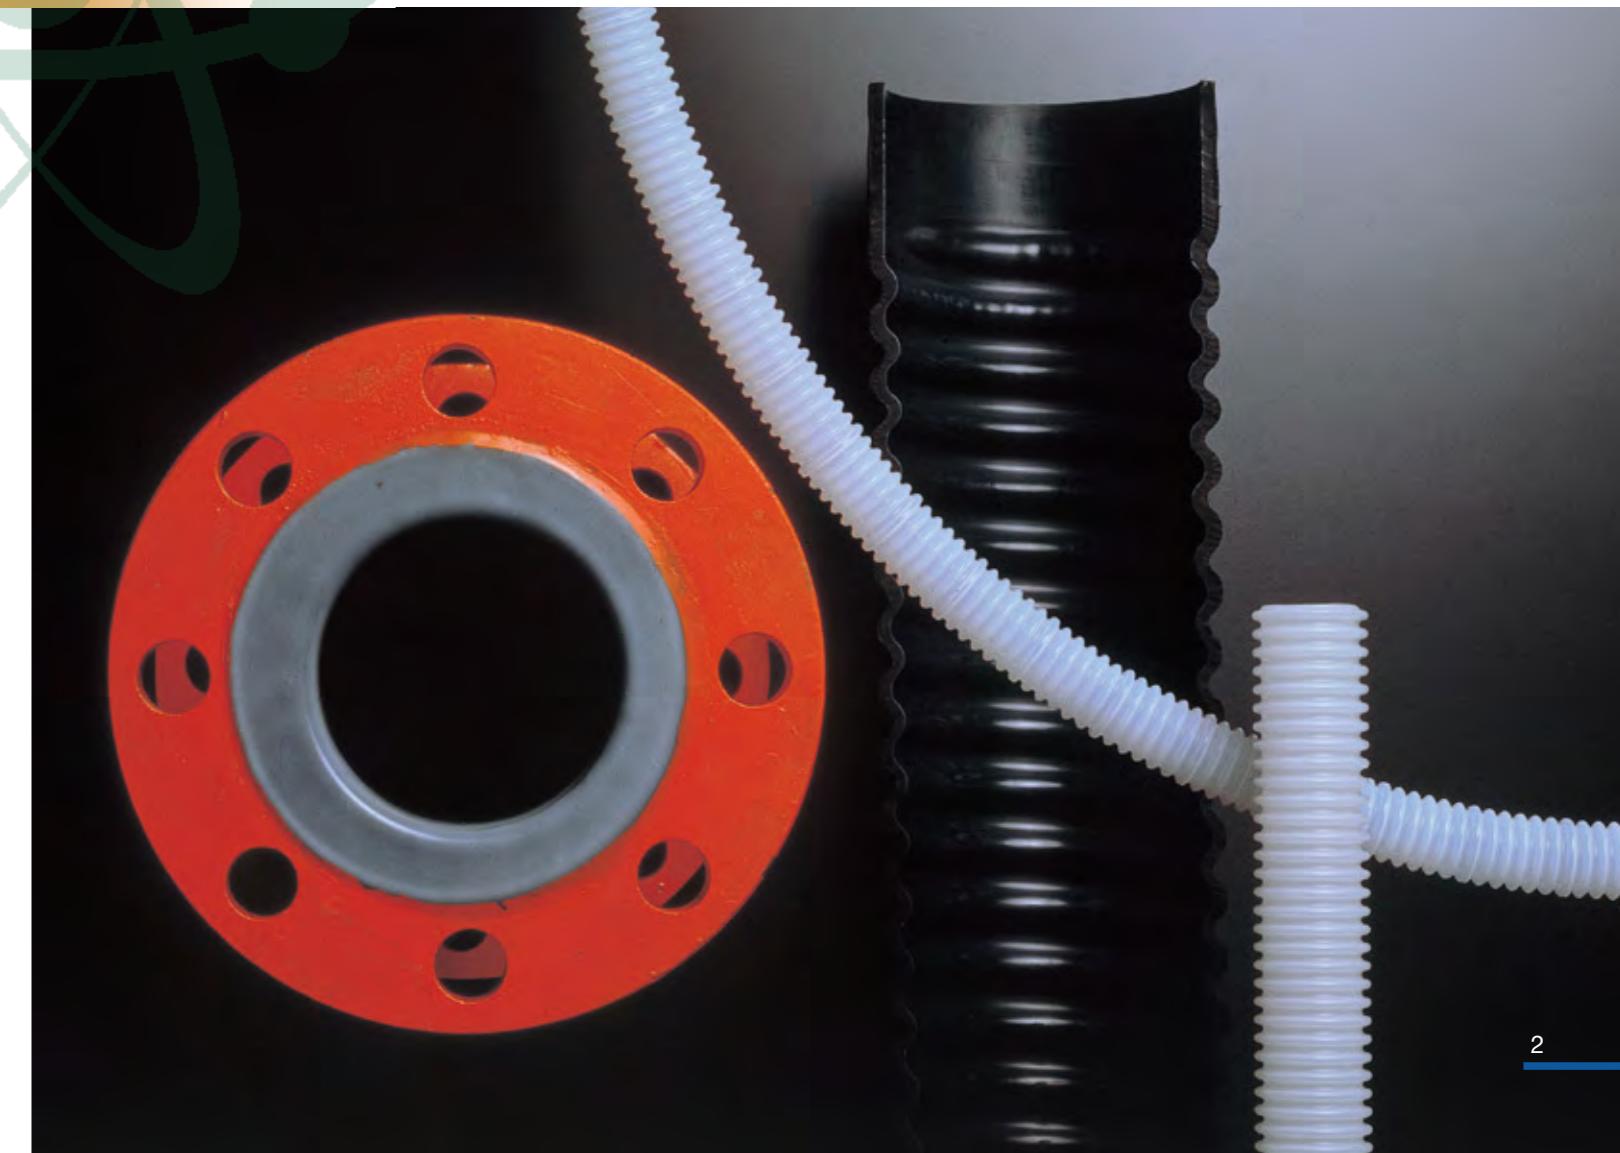

Fluon® ETFE supports in technological innovation and improves the quality of production.

Fluon® ETFE is used for various fields including various injection parts, electric wires coating, tubes and hoses, film for membrane structure, mold releasing film, and anticorrosion linings and coatings, etc.

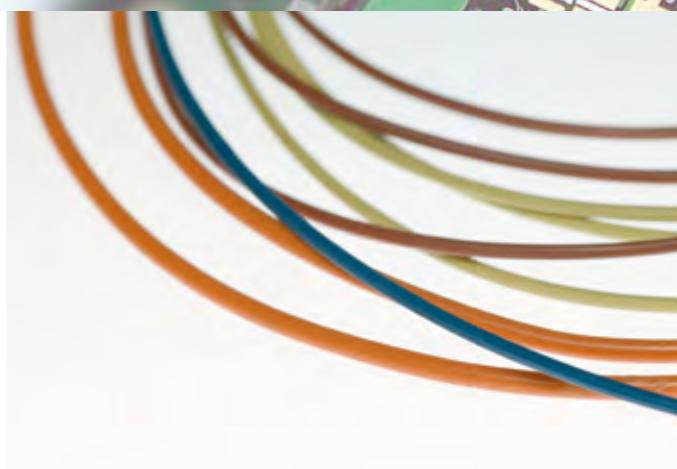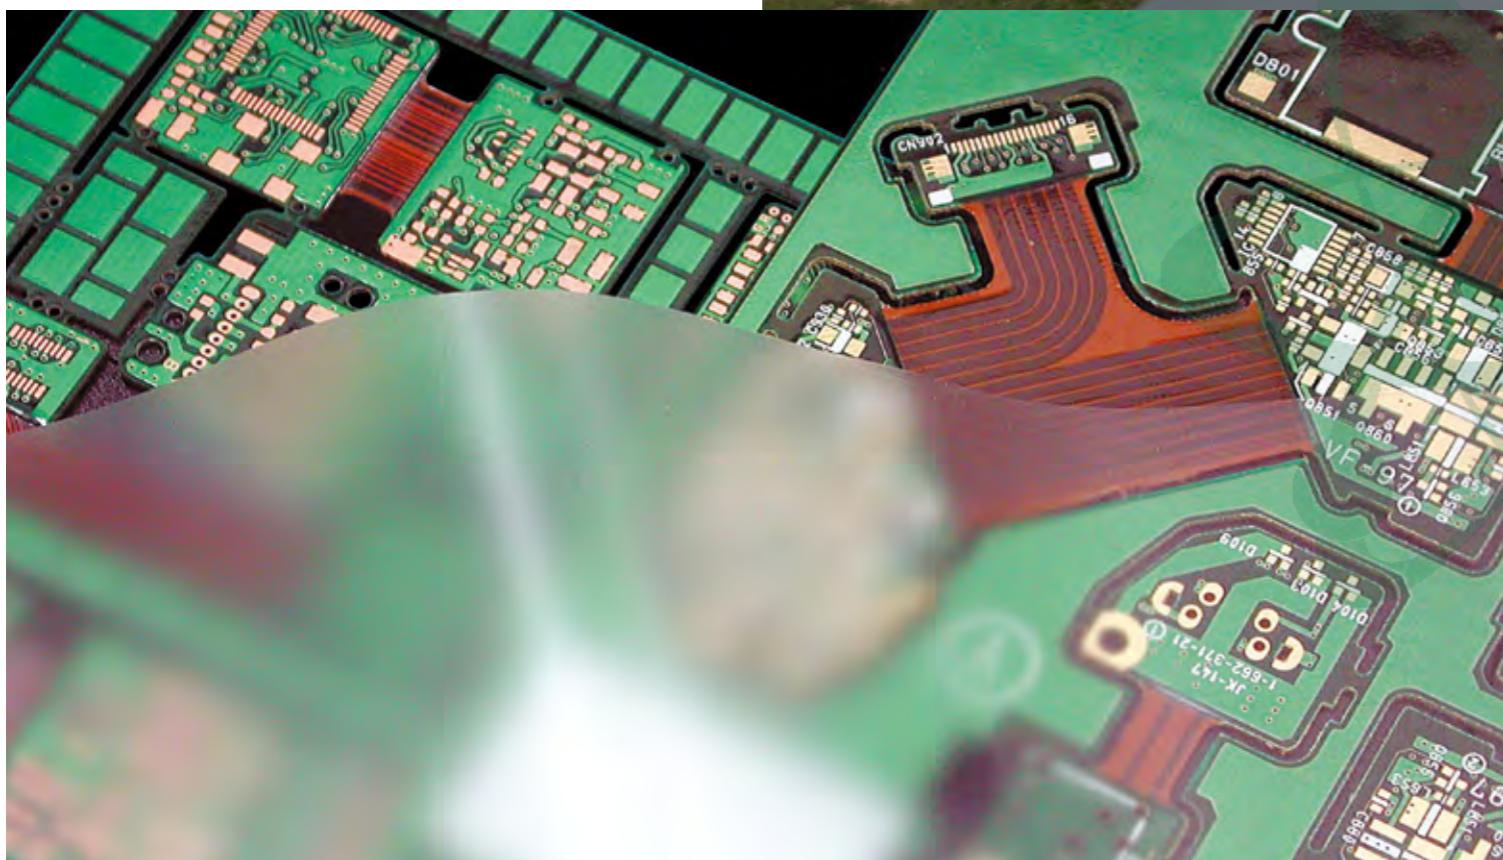

Excellent processability

Fluon® ETFE has excellent processability. Various molding methods are available as general thermoplastic resins. Film processing and various secondary processing are also available.

High performance within a wide range of temperatures

It is usable over a wide temperature range from -200 to +150°C, while maintaining stable mechanical and electrical properties. Continuous usage at +150°C is also possible.

Excellent chemical resistance and electrical properties

It has excellent resistance to almost all chemical agents and solvents. It has excellent electric insulation property, and exhibits higher dielectric strength even in the form of a thin film. It has a lower dielectric constant and dielectric loss tangent over a wide frequency range.

Nonflammable and safety

Nonflammable material conforming to UL standards 94V-O. Tasteless, odorless, and nonpoisonous. Recommended for the food industry. Moreover, Fluon® ETFE is US FDA compliance, and registered in the inventory of Food Contact Substances at #481.

Excellent weatherability

Resistant to ultraviolet light, and can be used outdoors over a long period.

Low surface energy

It possesses lower frictionality, anti-stick, and excellent water and oil repellency.

Properties


Fluon®ETFE				
	Item	Test Method	Unit	C-88AXP
Physical properties	MFR	ASTM-D3159 (297°C×49N)	g/10min	9.9 ~ 12.9
	Specific gravity	ASTM-D792		1.74
	Melting point	DSC	°C	260
	Glass transition temperature		°C	80
	Linear thermal expansion coefficient	ASTM-D696	10 ⁻⁵ /K	11 ~ 14
	Heat distortion temperature (181N)	ASTM-D7207	°C	63
	10% weight loss temperature	TGA	°C	390
	Specific heat		kJ/(kg·K)	1.2
	Thermal conductivity	ASTM-D177	W/(m·K)	0.17
	Gas permeability (oxygen)	ASTM-D1434	10 ⁻¹⁶ mol·m/m ² ·s·Pa	3.1
	Gas permeability (nitrogen)	ASTM-D1434	10 ⁻¹⁶ mol·m/m ² ·s·Pa	1.0
	Flammability	UL94V		V-0
	Poisson's ratio			0.43
Mechanical properties	Tensile strength at break	ASTM-D638	MPa	48
	Tensile elongation at break	ASTM-D638	%	415
	Flexural strength	ASTM-D790	MPa	25
	Flexural modulus	ASTM-D790	MPa	890
	Compression modulus	ASTM-D695	MPa	720
	Durometer hardness	D method		67
	Stress crack resistance	Mandrel Wrap method	Numbers of cracks/tests	0/3 (OK)
Electrical properties	Dielectric constant	ASTM-D150 10 ³ Hz		2.5
		10 ⁵ Hz		2.5
	Dielectric loss tangent	ASTM-D150 10 ³ Hz		0.0007
		10 ⁵ Hz		0.0080

Comparison to other polymers on chemical properties

	Fluon®ETFE	PVdF	ECTFE
Acid	◎	○	◎
Base	◎	△ Solving in alkalis and amines	○ Appearance of crack
Organic Solvents	◎	△ Solving in polar solvents	△ Appearance of swell
Gas Barrier Property	○	◎	○

Grades

	Grade	MFR(g/10min)	Composition	Molding Method/Purpose
Pellet	C-55AP	4.5 ~ 6.7	Natural	General injection, extrusion molding
	C-88AP	9.9 ~ 12.9		General injection, extrusion molding, blow
	C-55AXP	4.5 ~ 6.7		Molding (improved stress crack resistance grade)
	C-88AXP	9.9 ~ 12.9		General injection, extrusion molding (high fluidity grade)
	C-88AXMP	30 ~ 47	Natural	General injection, extrusion molding (high fluidity grade)
	CB-8015X	1 ~ 3.5	Carbon fiber 15%	Extrusion molding
Powder	CF-5020-X	5 ~ 10	Carbon fiber 20%	Injection molding
	Z-8820X	7 ~ 14	Natural	Electrostatic powder coating (30-50 μm thick)
	Z-885C	7 ~ 14	Natural	Electrostatic powder coating (50-150 μm thick)
	ZL-520N	5 ~ 11	Carbon fiber 20%	Fluid dip coating (50-400 μm thick)
	ZL-521N	3 ~ 7	Carbon fiber 5%	ZL-520N overcoating
	ZL-522F	1 ~ 14	Natural	Rotomolding
	TL-581	20 ~ 30	Natural	Rotomolding (2-5 mm thick)

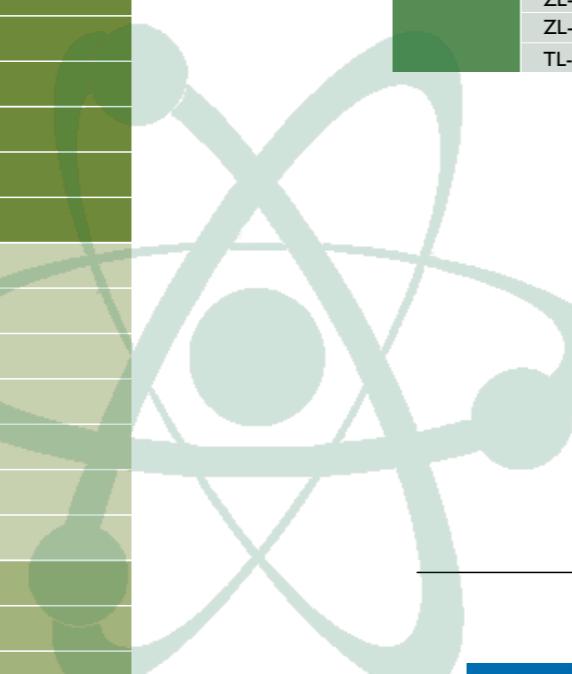

Fluoropolymer as Environment-symbiotic Technology

Nowadays, environmental protection is regarded as the highest priority theme in every industrial field. Fluoropolymer and fluoroelastomer have been applied into environmental friendly products and process techniques. The properties of fluoropolymer and fluoroelastomer such as weatherability, nonflammability and chemical resistance, give longer life to various products and save resources and reduce industrial wastes. For examples, Fluon® ETFE is used for fuel hose of automobile to reduce its fuel permeation, and F-CLEAN® ETFE film is used as film for agricultural house because of its long life. AGC helps your continuous effort for environment protection, through our development, improvement, and enhanced applications of these products. Simultaneously, AGC as a manufacturer of fluorine chemicals establishes recycling process technique and anti-pollution process technique in actual production sites, to continuously effort to reduce the environmental load by the fluorine products themselves. AGC believes that the technology of fluoropolymer with advantageous possibilities contributes to solve environmental problems and plays an important role in realizing a safe and comfortable society of environment-symbiotic type.